

# OPERATION MANUAL

MODEL: V9-E



**Warning** to reduce the risk of injury, the user must read and understand the operator's manual

# IMPORTANT SAFETY INSTRUCTIONS

Save these instructions

This is not a toy and is intended for proper use by legally competent mentally fit adults over the age of 21. Vulcan Flamethrowers, LLC and its, managers, members, agents, and representatives shall not be liable for any damages that result from improper or unauthorized use.

## **TO REDUCE RISK OF INJURY:**

1. Read all instructions before operating product. Failure to follow all instructions listed below may result in burns, unintentional fires and/or serious injury or death.
2. KEEP OUT OF REACH OF CHILDREN
3. Inspect for leaks before operation. If you notice any leakage discontinue use immediately and contact Vulcan Flamethrowers LLC.
4. Never aim in the direction of anything you don't purposely intend on incinerating.
5. Do not touch the front of the flamethrower (nozzle or electrodes) they will be hot during and after operation.
6. Do not adjust or touch the electrodes during use.
7. If the electrodes, wire or coil are damaged discontinue use immediately
8. Keep all parts of body as far away as possible from nozzle during use.
9. Do not use if there is any wind present.
10. Do not expose to or use in temperatures higher than 100F or lower than 0F.
11. Fuel has the ability to drip from the nozzle of the device at any time. Always be sure it is pointed safely away from people.
12. Never aim the flamethrower higher or lower than 45 degrees.
13. DO NOT DISASSEMBLE IN ANY WAY.
19. Do not press the button on the handle and run the pump when it's dry for more than 2 seconds or you will permanently damage the pump.
20. Never operate the flamethrower while under the influence of drugs and/or alcohol.
21. Do not remove the cap while in use
22. Refuel the unit while it sitting on the ground
23. Do not use indoors

## OPERATION

**Before use charge your battery fully and mix your fuel in a fuel safe container.**

**Fuel:** You can use straight gasoline or gasoline and diesel fuel mixed in a 60/40 ratio (60% gas to 40% diesel)

Straight gasoline will sacrifice some distance. You will shoot approximately 25 feet.


Gasoline and diesel mixed 60% gas to 40% diesel is our recommended mix for distance. You will Achieve approximately 25+ feet with this mix.

Do not use straight diesel. It is difficult to ignite and you will have unburned fuel spraying and falling to the ground.

**NEVER THICKEN YOUR FUEL WITH AN ADDITIVE TO MAKE NAPALM. YOU WILL SEIZE THE PUMP AND VOID YOUR WARRANTY**

1. Unscrew the cap and set aside. Fill the tank with your fuel mixture or straight gasoline. Screw the cap back on until it's Snug.
  - a. If you spill or drip any fuel on the side of the tank it's ok. Wipe off the tank with a towel and any other part of the body that may have fuel on it. We suggest using soap and water in a spray bottle to clean off the body or simple green. (other cleaners may damage the paint)
2. Insert the battery into the flamethrower just below the rear handle.
  - a. Do not force the battery it has guide rails and should push in easily. The battery will be snug until the battery is inserted and removed several times.
  - b. To remove the battery firmly pinch the sides of the battery and pull straight back.
3. Now switch the flamethrower on. The on/off switch is located next to the battery.
4. Every time you press the trigger button the electrodes at the end of the barrel will arc and you will emit a flaming stream approximately 25 feet.

5. When your finished using the flamethrower. The shut down process is just the reverse order of the startup process.
  - a. Set the flamethrower down switch the unit off.
  - b. Remove the battery
  
6. If you're completely finished and ready to store your flamethrower. Remove the battery clean off any fuel on the flamethrower and store in a dry place away from any heat source.
  - a. If you're not going to use your flamethrower for more than two weeks. While outside pour 5 ounces of fuel with fuel stabilizer in the tank. Install a battery and press the button to spray the fuel through the flamethrower. Now it will have stabilized fuel inside the pump.

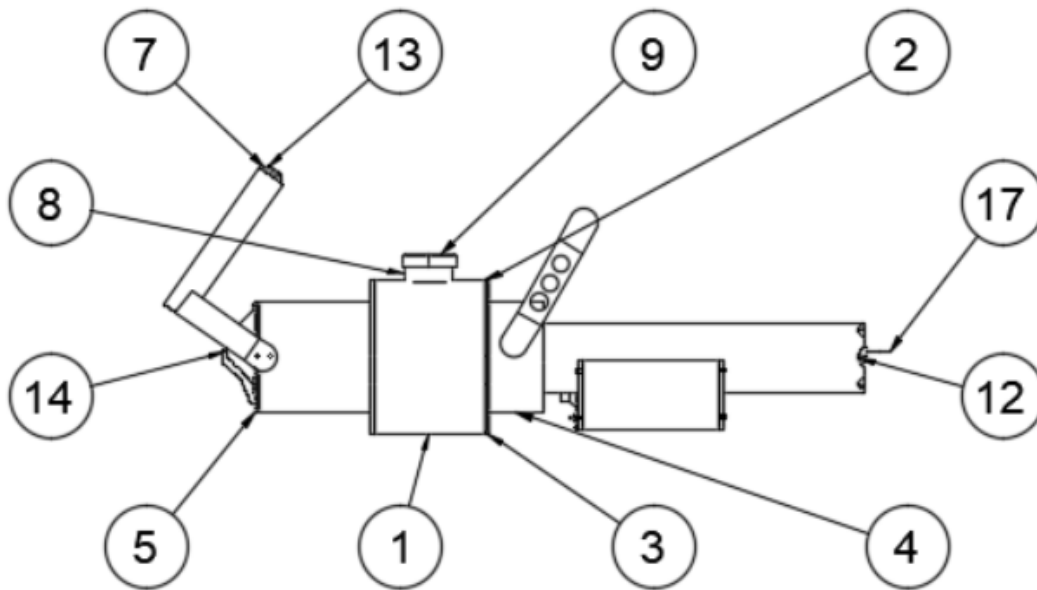

PARTS LIST	
ITEM	PART NUMBER
1	TANK 6"
2	TANK REAR
3	BARREL
4	NOSE
5	TAIL CAP
6	BARREL HOLDER
7	REAR HANDLE
8	FUEL BUNG
9	FUEL CAP
10	FRONT HANDLE SIDES
11	FRONT HANDLE
12	BARREL CENTERING RING
13	TRIGGER BUTTON
14	BATTERY HOOD
15	ON/OFF BUTTON
16	BATTERY HOLDER
17	ELECTRODE
18	COIL TUBES
19	COIL TUBE CAPS
20	COIL
21	COMPONENT26

Please check out the frequently asked question section of our website. It's at the top of the page just click the link.

Information about your warranty is located on our website.

You can contact us at [vulcanflamethrowers@gmail.com](mailto:vulcanflamethrowers@gmail.com)

Thank you for your purchase

The information contained in this manual is updated often. The latest version is available on our website and instructional videos are on our YouTube channel

Copyright 2016 Vulcan Flamethrowers LLC.

Vulcan V9 flamethrower are trademarks of Vulcan Flamethrowers LLC.

All rights reserved